

09/29/99
10571 U.S. PTO

Please type a plus sign (+) inside this box → ☒

Approved for use through 09/30/00 OMB 0651-0032
Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995 no persons are required to respond to a collection of information unless it displays a valid OMB control number

UTILITY PATENT APPLICATION TRANSMITTAL (Only for new nonprovisional applications under 37 CFR 1.53(b))	Attorney Docket No.	3602/100	Total Pages	
	First Named Inventor or Application Identifier			
	Arthur S. Lynch, et al.			
	Express Mail Label No.	EJ619457641		

APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents.	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
---	--

<p>1. <input checked="" type="checkbox"/> Fee Transmittal Form (Submit an original, and a duplicate for fee processing)</p> <p>2. <input checked="" type="checkbox"/> Specification [Total Pages 14] (preferred arrangement set forth below) - Descriptive title of the invention - Cross References to Related Applications - Statement Regarding Fed sponsored R & D - Reference to Microfiche Appendix - Background of the Invention - Brief Summary of the invention - Brief Description of the Drawings (if filed) - Detailed Description - Claim(s) - Abstract of the Disclosure</p> <p>3. <input checked="" type="checkbox"/> Drawing(s) (35 USC 113) [Total Sheets 3]</p> <p>4. Oath or Declaration [Total Pages 3] a. <input type="checkbox"/> Newly executed (original or copy) b. <input checked="" type="checkbox"/> Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed) (Note Box 5 below) i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).</p> <p>5. <input checked="" type="checkbox"/> Incorporation By Reference (useable if Box 4b is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.</p>	<p>6. <input type="checkbox"/> Microfiche Computer Program (Appendix)</p> <p>7. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) a. <input type="checkbox"/> Computer Readable Copy b. <input type="checkbox"/> Paper Copy (identical to computer copy) c. <input type="checkbox"/> Statement verifying identity of above copies</p>
---	---

ACCOMPANYING APPLICATION PARTS	
8. <input type="checkbox"/> Assignment Papers (cover sheet & document(s))	
9. <input type="checkbox"/> 37 CFR 3.73(b) Statement (when there is an assignee)	<input checked="" type="checkbox"/> Power of Attorney
10. <input type="checkbox"/> English Translation Document (if applicable)	
11. <input checked="" type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449	<input type="checkbox"/> Copies of IDS Citations
12. <input checked="" type="checkbox"/> Preliminary Amendment	
13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized)	
14. <input type="checkbox"/> Small Entity Statement filed in prior application.	<input type="checkbox"/> Status still proper and desired
15. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed)	
16. <input type="checkbox"/> "Express Mail" mailing label number EJ619457641	
Date of Deposit: 9/29/99	
I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to	

17. If a **CONTINUING APPLICATION**, check appropriate box and supply the Request for Continuation of Patents and Trademarks, Washington, D.C. 20239, 069,431 of prior application No. None

☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP)

18. **CORRESPONDENCE ADDRESS**

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

Neal L. Rosenberg
(Signature of Corresponding addresser)

NAME	<i>Neal L. Rosenberg</i>				
	Neal L. Rosenberg, Esq.				
ADDRESS	AMSTER, ROTHSTEIN & EBENSTEIN				
	90 Park Avenue				
CITY	New York	STATE	NY	ZIP CODE	10016
COUNTRY	US	TELEPHONE	212-697-5995	FAX	212-286-0854

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of : Arthur S. Lynch et al.
Serial No. : Unknown
Filed : Herewith
For : GUIDEWIRE ADVANCEMENT SYSTEM

"Express Mail" mailing label No. EJ619457641
Date of Deposit: 9/29/99

I hereby certify that this paper or fee is being deposited
with the United States Postal Service "Express Mail Post
Office to Addressee" service under 37 CFR 1.10 on the date
indicated above and is addressed to the Assistant
Commissioner for Patents, Washington, D.C. 20231.

Name: 9-29-99

Signature: Arthur S. Lynch

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Prior to examination of the above-identified application, please amend the same
as follows:

IN THE SPECIFICATION:

Page 1, line 3, after "is" add -- a continuation of Application No. 09/069,431 filed
April 29, 1998, which is --.

Page 1, last line, after "engaged" add --with the guidewire, may be inserted into
the--.

IN THE CLAIMS:

Cancel claims 2, 3, 4, 5, 7, 8, 9, 10, 11, 13, 14, 17, 19 and 22.

Amend the claims as follows:

Claim 6, line 1, delete "5" and add --1--; lines 1-2, delete "wherein the aperture is on the flexible tube and"; and line 3, delete "flexible tube" and add --casing--.

Claim 15, line 1, delete "11" and add --1--.

Claim 18, line 3, delete "flexible tube" and add --casing--.

Claim 20, line 1, delete "17" and add --16--; and line 3, delete "the" and add --a--.

Rewrite Claims 1 and 16 as follows:

1. [Amended] A guidewire advancement device comprising:

a flexible guidewire having a curved distal end;

a [flexible tube] casing for holding the guidewire, the [flexible tube] casing being formed in a loop and having [a port] an outlet;

[a housing having an opening for feeding the guidewire through, the housing being coupled to a distal end of the flexible tube, and the housing having a straightener thereon that includes] a [straightener tube] straightening element having a guidewire exit point and a tube portion adjacent the guidewire exit point, the tube portion formed [length and diameter] to straighten the curved distal end of the guidewire as the guidewire is passed through the [straightener tube] tube portion, the straightening element being connected to the casing at the guidewire exit point; and

an [access mechanism] aperture on said straightening element to expose a portion of the guidewire [positioned] and through which the portion of the guidewire can be

manually engaged, the aperture being located between the outlet of the casing and the tube portion of the straightening element.

16. [Amended] A guidewire advancement device [for a flexible guidewire having a curved distal end, the guidewire advancement device] comprising:

a flexible guidewire having a curved distal end;

a [flexible tube] casing for holding the guidewire, the casing being formed in a loop and having a portion extending beyond the loop, the portion extending to an end port;

[a housing having housing tube for receiving the guidewire, the guidewire extending through a first end of the housing and through the second end of the housing;]

an aperture in the casing to expose a [portion] length of the guidewire [positioned in the flexible tube] and through which the [portion] length of the guidewire can be manually engaged in order to displace the guidewire relative to the end port, the aperture positioned near the end port of the casing; and

a straightener that is connected to the [housing tube and] casing at the end port, which receives the guidewire displaced through the [housing] casing, the straightener including a straightener tube having a length and diameter to straighten the curved distal end of the guidewire.

Add Claims 23 as follows:

--23. The guidewire advancement device of Claim 16 wherein the portion of the casing extending from the loop extends tangentially from the loop.--

REMARKS

Claims 1, 6, 12, 15, 16, 18, 20, 21 and 23 are presented for examination. Claims 1 and 16 are in independent form and are believed to be patentable over the known prior art.

In addition to a copy of the parent application, Applicant submits a copy of the Declaration, a "Revocation of Prior Powers of Attorney and the Appointment of New Powers of Attorney" and an Information Disclosure Citation Statement, all from the parent application.

In view of the above amendments and remarks, a prompt examination of all claims is respectfully requested.

Respectfully submitted,

AMSTER, ROTHSTEIN & EBENSTEIN
Attorneys for Applicant
90 Park Avenue
New York, New York 10016
(212) 697-5995

By: 

Neal L. Rosenberg
Registration No. 21,088

Dated: New York, New York
September 29, 1999

MPI86-01ZA6
K:\RBRUTTOM\MPI\8601ZA6\MPI8601Z.APL
TOH/RIB/asb
April 29, 1998

EJ619457641US

-1-

Date: 4/29/99 Express Mail Label No. EJ619457641

Inventor(s): Arthur S. Lynch and A. Walter MacEachern
Attorney's Docket No.: 86-01ZA6

GUIDEWIRE ADVANCEMENT SYSTEM

RELATED APPLICATION(S)

This application is a continuation of Application No. 08/455,698 filed May 31, 1995, which is a continuation of
5 Application No. 08/221,083 filed March 31, 1994, which is a continuation of Application No. 07/993,414 filed December 21, 1992, which is a continuation of Application No. 07/788,049 filed November 5, 1991 which is a continuation of U.S. Application No. 07/509,500 filed on April 13, 1990
10 which is a continuation-in-part of U.S. Application No. 07/372,047 filed on June 27, 1989, now U.S. Patent No. 4,917,094, which was a divisional application of U.S. Application No. 07/114,451 filed on October 28, 1987, now U.S. Patent No. 4,860,757, the entire contents of the above
15 applications are incorporated herein by reference.

BACKGROUND OF THE INVENTION

The invention relates to devices for the insertion of catheter guidewires into blood vessels. A guidewire is inserted so that a catheter, which is coaxially engaged

blood vessel. The guidewire is then withdrawn, and the catheter is ready for further positioning and use. It is imperative that guidewires be inserted without contamination of the sterile field to avoid unnecessary infection of the patient.

Guidewires are generally comprised of a coiled spring guide with a distal tip and one or more wires running longitudinally within the spring. Such guidewire constructions are disclosed in U.S. Patents 4,003,369 and 4,676,249. Catheters are generally hollow, flexible tubes used to convey liquids or other instruments to a desired location in the body.

Existing systems for guidewire insertion suffer from continued problems arising from the lack of ease in manipulation and the exposure during insertion to a non-sterile environment. Normally, a guidewire is removed completely from its package prior to use, is wound in the physician's hand and inserted through a needle extending into the patient's artery, or through a cannula into some other body cavity. Three or more hands are required to hold the needle stationary while the "J" guidewire is pulled through a straightener, then pushed through the port in the needle. The inadvertent extension of the guidewire prior to insertion and the awkwardness of manipulation during insertion leads to contamination of the sterile field and the patient's blood stream. It is also desirable that the physician or operator be able to tactilely sense the progress of the guidewire tip during insertion to insure better control.

SUMMARY OF THE INVENTION

A catheter guidewire is packaged for use in a hollow tube or casing which maintains a sterile environment for the guidewire prior to use. The guidewire is displaceable

through an outlet at one or both ends of the tube for insertion into the desired artery or body cavity.

An aperture in the casing is located adjacent to the outlet so as to provide access to the guidewire surface.

- 5 By applying a lateral frictional force to the surface of the guidewire in the direction of the outlet, the guidewire can be displaced through the narrow tube and the outlet.

- A second tube attached to the outlet and disposed to receive the guidewire as it exits the casing can be used to
10 straighten a "J" guidewire prior to entering a canal through a needle or cannula. In a preferred embodiment of the invention, the aperture for frictionally displacing the guidewire can be located in the straightening tube. The invention thus provides a means for maintaining a sterile
15 environment during storage and insertion of the guidewire. Only one hand is necessary to operate the dispensing mechanism while the desired sensitivity to guidewire placement is maintained.

- In another preferred embodiment, a moveable member is
20 positioned over the aperture to maintain a sterile environment for the guidewire while at the same time providing the frictional force to displace the guidewire. This moveable member can be hand actuated rollers or a slidable bar or any other suitable mechanical device that
25 maintains the tactile sense of the operator with regard to directing the guidewire through the system. The member which can be manually depressed to frictionally engage the guidewire surface. The moveable member can also be placed in a housing used to hold the two ends of the casing.

- 30 One embodiment of the system provides for the transmission of an electrocardiographic signal through the guidewire to determine the position of the distal end of the guidewire that has been inserted into a body canal. The housing that holds the frictionally engaging member

referenced above is positioned about the aperture and used to transmit an internally generated electrical signal onto the conductive guidewire element.

The above, and other features of the invention, including various novel details of construction and combination of parts, will now be more particularly described with reference to the accompanying drawings and pointed out in the claims. It will be understood that the particular guidewire advancement system embodying the invention is shown by way of illustration only and not as a limitation of the invention. The principle features of this invention may be employed in varied embodiments without departing from the scope of the invention. For example, the device can be utilized in the catheterization of any body cavity or artery, or alternatively in any veterinary applications involving catheterization procedures.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other objects, features and advantages of the invention will be apparent from the following more particular description of preferred embodiments of the invention, as illustrated in the accompanying drawings in which like reference characters refer to the same parts throughout the different views. The drawings are not necessarily to scale, emphasis instead being placed upon illustrating the principles of the invention.

Fig. 1 illustrates a plan view of the guidewire system generally;

Fig. 2 schematically illustrates a close up view of the guidewire aperture operated by hand;

Fig. 3 illustrates a plan view of an alternative embodiment where the aperture is located in the guidewire straightener;

Fig. 4 illustrates a perspective view of a guidewire advancement system using a slidable bar;

Fig. 5 illustrates a perspective view of a guidewire advancement system using rollers; and

Fig. 6 is a magnified cross-sectional view illustrating the use of an external monitor that displays an internally generated electrical signal transmitted along the guidewire that is employed in determining the position of the guidewire.

DETAILED DESCRIPTION OF THE INVENTION

A preferred embodiment of the guidewire advancement system 10 is illustrated in Figure 1. A flexible hollow tube 11 can be disposed in the shape of a curve or loop(s) as depicted to facilitate ease of operation. A guidewire 12 of standard coiled spring design is slidably inserted into tube 11. The guidewire 12 can enter or exit tube 11 through either of the two open ends 17 and 18. The guidewire 12 is inserted into a vein or artery through a needle, or canal or cavity by a cannula 19.

One end of the guidewire 12 can be formed in the shape of a flexible "J" 13. The "J" 13 may be straightened by pulling the end of the guidewire bearing the "J" back into the straightening element 14. The straightener 14 has a narrow hollow tube to which the "J" must conform upon entry therein. The straightener 14 is attached to tube 11 by inserting a small diameter portion 20 of straightener 14 into the port 17. The outer diameter of portion 20 is chosen so that it fits snugly into the hollow tube 11 at 17. The purpose of the "J" 13 is to permit the guidewire operator to more precisely direct the insertion of the

guidewire to the precise arterial location desired. As the guidewire proceeds along the inside of an artery there are commonly two or more paths for it to follow. The operator, using the tension in the straightened "J" to return to its preferred shape, can direct the guidewire down the desired artery path. Simply by rotating the guidewire within the cannula 19, the "J" 13 will be redirected as desired.

Existing guidewire packages typically involve the complete removal of the guidewire from the tubing in which they are stored before use. This often exposes the guidewire to non-sterile environments thereby risking the infection of the patient when the exposed guidewire is inserted into the bloodstream.

The present invention claims the use of apertures 15 and 16 located adjacent the two end ports 17 and 18. These apertures provide access to the guidewires 12 so that it may be inserted into the bloodstream without being first removed from its storage tube 11 or jacket. The apertures 15 and 16 permit the use of the guidewire to be confined within the sterile field thereby substantially reducing the risk of unnecessary infection.

Figure 2 illustrates how the apertured guidewire system may be operated by hand. By inserting his or her thumb into the aperture 16, the operator frictionally engages the guidewire 12, and can either advance or retract it as shown. This design permits one handed operation that is sensitive to guidewire placement. Aperture 16 may be used, as opposed to aperture 15 in figure 1, where the operator prefers to use the straight end 21 of the guidewire through port 18, instead of the "J" shaped end 13.

Figure 3 illustrates another preferred embodiment of the invention where the straightener 14 is provided with aperture 25. The guidewire 12 can be manipulated through

aperture 25 directly adjacent the guidewire exit point 22, instead of further back along the tube 11 at aperture 15 in Figure 1.

To further isolate the guidewire from exposure to non-sterile environments the apertures 15 and 16 can be enclosed with an element 30 as illustrated in Figures 4 and 5. The element 30 is used to hold the two ends of the tube 11 in the shape of a loop as shown in Figure 1. The two ends of tube 11 are both snapped into the two parallel partially open tubes 33 extending through element 30 such that the apertures 15 and 16 (not shown) are completely enclosed.

A rectangular opening 31 can be made in the element 30 opposite the apertures (not shown) in tube 11. A slidable cam or bar 32 may be fitted into opening 31 that can be manually depressed to frictionally engage the guidewire. By positioning the cam 32 at one end of the opening 31, the guidewire 12 may be advanced through the tube 11 in one direction. By depressing the cam 32 to engage the guidewire, the operator slides the cam 32 to the other end of the opening 31, releasing the cam 32 from its depressed position, moving the cam 32 back to its position at the opposite end of the opening 31, and then repeating this sequence of steps until the guidewire is in the desired location.

Figure 5 illustrates a further embodiment of the invention in which a number of rollers 35 may be depressed to engage the guidewire 12 through an enclosed aperture in tube 11. These rollers frictionally engage the guidewire 12 such that their manually actuated rotation causes the guidewire to be pushed through tube 31 for insertion into the artery.

Both the cam 32 of Figure 4 and the rollers 35 of Figure 5 may be held within member 30 by resilient means

which lift the cam 32 or rollers 35 off of the guidewire 12 when not manually depressed against it by the operator. This resilient means renders the cam 32 or rollers 35 easier to cycle a number of times to fully extend the
5 guidewire.

Another preferred embodiment is illustrated in the magnified cross sectional view of Figure 6. As in Figure 4, a conductive guidewire 12 is displaceable through tubing 11, that is held by a housing 30. A slideable bar 32 is
10 configured to move back and forth within an opening 31. The bar 32 is supported by a track 43. A lower portion of the track 43 incorporates a conductive lining 44 in conductive contact with a conductive pad 40 mounted on the underside of bar 32. The track 43 and attached lining 44
15 are flexible thereby permitting the bar 32 to be depressed manually by the operator such that the pad 40 comes in contact with the guidewire through aperture 15 of tube 11. The lining 44 is in conductive contact with an outlet 42 by wire 41. The outlet 42 is mated with an external plug 45
20 connected to a monitoring circuit 38 including a diode 39 and an external monitor 46. The diode 39 prevents any back current from being transmitted from circuit 38 into the guidewire which can be harmful to the patient. The electrical signal generated by an internal organ such as
25 the human heart transmits a signal through the guidewire 12 to pad 40 when the bar 32 is depressed. This signal is transmitted through the distal tip of the guidewire that has been inserted into a bodily canal or artery to determine the location of the distal tip within the body
30 being catheterized. As the tip approaches the heart muscle, it transmits the electrical current generated about the heart along the guidewire through the engaging means of the housing to be displayed by the monitor 46. This system provides for a more precise positioning of the

guidewire as well as the catheter while at the same time providing for the sterile insertion of the guidewire.

EQUIVALENTS

While this invention has been particularly shown and
5 described with references to preferred embodiments thereof,
it will be understood by those skilled in the art that
various changes in form and details may be made therein
without departing from the spirit and scope of the
invention as defined by the appended claims. Those skilled
10 in the art will recognize or be able to ascertain using no
more than routine experimentation, many equivalents to the
specific embodiments of the invention described
specifically herein. Such equivalents are intended to be
encompassed in the scope of the claims.

CLAIMS

What is claimed is:

1. 1. A guidewire advancement device comprising:
a flexible guidewire having a curved distal end;
5 a flexible tube for holding the guidewire, the flexible tube having a port;
a housing having an opening for feeding the guidewire through, the housing being coupled to a distal end of the flexible tube, and the housing
10 having a straightener thereon that includes a straightener tube having a length and diameter to straighten the curved distal end of the guidewire as the guidewire is passed through the straightener tube; and
15 an access mechanism to expose a portion of the guidewire positioned and through which the portion of the guidewire can be manually engaged.
2. The guidewire advancement device of claim 1 wherein the access mechanism is an aperture on the flexible
20 tube.
3. The guidewire advancement device of claim 1 wherein the access mechanism is an aperture on the housing.
4. The guidewire advancement device of claim 1 further
25 comprising a frictionally engaging element for selectively frictionally engaging the guidewire.
5. The guidewire advancement device of claim 4 wherein the access mechanism is an aperture and the frictionally engaging element overlies the aperture.

6. The guidewire advancement device of claim 5 wherein the aperture is on the flexible tube and further comprising a second aperture on the flexible tube.
- 5 7. The guidewire advancement device of claim 1 wherein the access mechanism is an aperture and further comprising a frictionally engaging element for selectively frictionally engaging the guidewire.
- 10 8. The guidewire advancement device of claim 7 wherein the frictionally engaging element for selectively frictionally engaging the guidewire has a plurality of rollers.
9. The guidewire advancement device of claim 1 wherein the aperture is on the flexible tube.
- 15 10. The guidewire advancement device of claim 7 wherein the frictionally engaging element for selectively frictionally engaging the guidewire has a slideable bar.
11. The guidewire advancement device of claim 10 wherein the aperture is on the flexible tube.
- 20 12. The guidewire advancement device of claim 1 further comprising a retaining element for retaining the flexible tube in the shape of a loop.
- 25 13. The guidewire advancement device of claim 12 wherein the access mechanism is an aperture on the flexible tube and further comprising a frictionally engaging element having a plurality of roller for selectively frictionally engaging the guidewire.

14. The guidewire advancement device of claim 12 wherein the access mechanism is an aperture on the flexible tube and further comprising a frictionally engaging element having a slideable bar for selectively
5 frictionally engaging the guidewire.
15. The guidewire advancement device of claim 11 further comprising a cannula that receives the guidewire from the straightener.
16. A guidewire advancement device for a flexible
10 guidewire having a curved distal end, the guidewire advancement device comprising:
a flexible tube for containing the guidewire;
a housing having a housing tube for receiving the guidewire, the guidewire extending through a first end
15 of the housing and through a second end of the housing;
an aperture to expose a portion of the guidewire positioned in the flexible tube and through which the portion of the guidewire can be manually engaged; and
20 a straightener that is connected to the housing tube and receives the guidewire displaced through the housing, the straightener including a straightener tube having a length and diameter to straighten the curved distal end of the guidewire.
- 25 17. The guidewire advancement device of claim 16 wherein the housing having a second housing tube for receiving a second portion of the guidewire.
18. The guidewire advancement device of claim 16 further comprising a second aperture to expose a portion of
30 the guidewire positioned in the flexible tube and

through which the portion of the guidewire can be manually engaged.

19. The guidewire advancement device of claim 18 wherein the housing further comprises a second housing tube for receiving a second portion of the guidewire and the housing overlies both the first and second aperture of the flexible tube.
20. The guidewire advancement device of claim 17 wherein the flexible tube is retained in the shape of a loop by the housing.
21. The guidewire advancement device of claim 20 further comprising a cannula that receives the guidewire from the straightener.
22. The guidewire advancement device of claim 21 wherein the guidewire can be manually engaged through the aperture without an intervening mechanical element.

GUIDEWIRE ADVANCEMENT SYSTEM

ABSTRACT OF THE DISCLOSURE

A guidewire advancement system for inserting catheter guidewires into blood vessels, and more particularly a
5 guidewire dispensing system for the controlled sterile insertion of a coiled spring guidewire to avoid infection of the patient. The system provides for the transmission of an electrical signal by the guidewire to determine its location within the body.

5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
22

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

I hereby certify that this correspondence is being
mailed with the United States Postal Service as
First Class Mail in an envelope addressed to:
Commissioner of Patents and Trademarks,
Washington, D.C. 20231 on the date which appears
below.

In re Application of : Arthur S. Lynch and A. Walter MacEachern

Signature

Neal L. Rosenberg reg # 21,088

Serial No. : 09/069,431

Filed : April 29, 1998

For : GUIDEWIRE ADVANCEMENT SYSTEM

Examiner : R. Shay

Group Art Unit : 3738

REVOCATION OF PRIOR POWERS OF ATTORNEY
AND
APPOINTMENT OF NEW POWERS OF ATTORNEY

To the Commissioner of Patents and Trademarks:

The undersigned inventors of the above-identified application for letters patent hereby revoke all prior Powers of Attorney and appoint the following attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: Morton Amster, Reg. No. 16,677; Jesse Rothstein, Reg. No. 20,118; Daniel S. Ebenstein, Reg. No. 24,932; Philip H. Gottfried, Reg. No. 25,871; Michael J. Berger, Reg. No. 25,829; Neil M. Zipkin, Reg. No. 27,476; Anthony F. LoCicero, Reg. No. 29,403; Joel E. Lutzker, Reg. No. 29,406; Kenneth P. George, Reg. No. 30,259; and Neal L. Rosenberg, Reg. No. 21,088, all members of the Bar of the State of New York and the United States Patent and Trademark Office,


provided that if any one of said attorneys ceases being affiliated with the law firm of Amster, Rothstein & Ebenstein as partner, employee or of counsel, such attorney's appointment as attorney and all powers derived therefrom shall terminate on the date such attorney ceases being so affiliated.

Direct all telephone calls to Kenneth P. George at (212) 697-5995.


Address all correspondence to:

Kenneth P. George, Esq.
AMSTER, ROTHSTEIN & EBENSTEIN
90 Park Avenue
New York, New York 10016

Dated: November 2, 1998

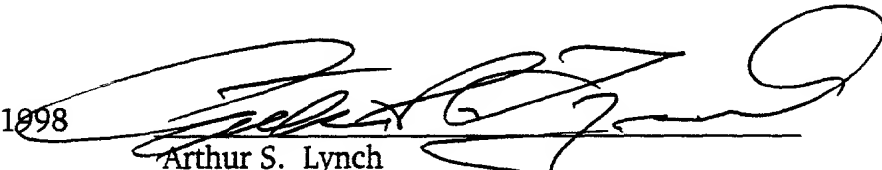
Arthur S. Lynch

Dated: November 2, 1998

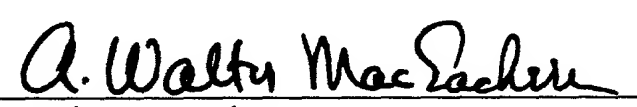
A. Walter MacEachern

1. *Chrysomelidae* (Coleoptera): 10 species

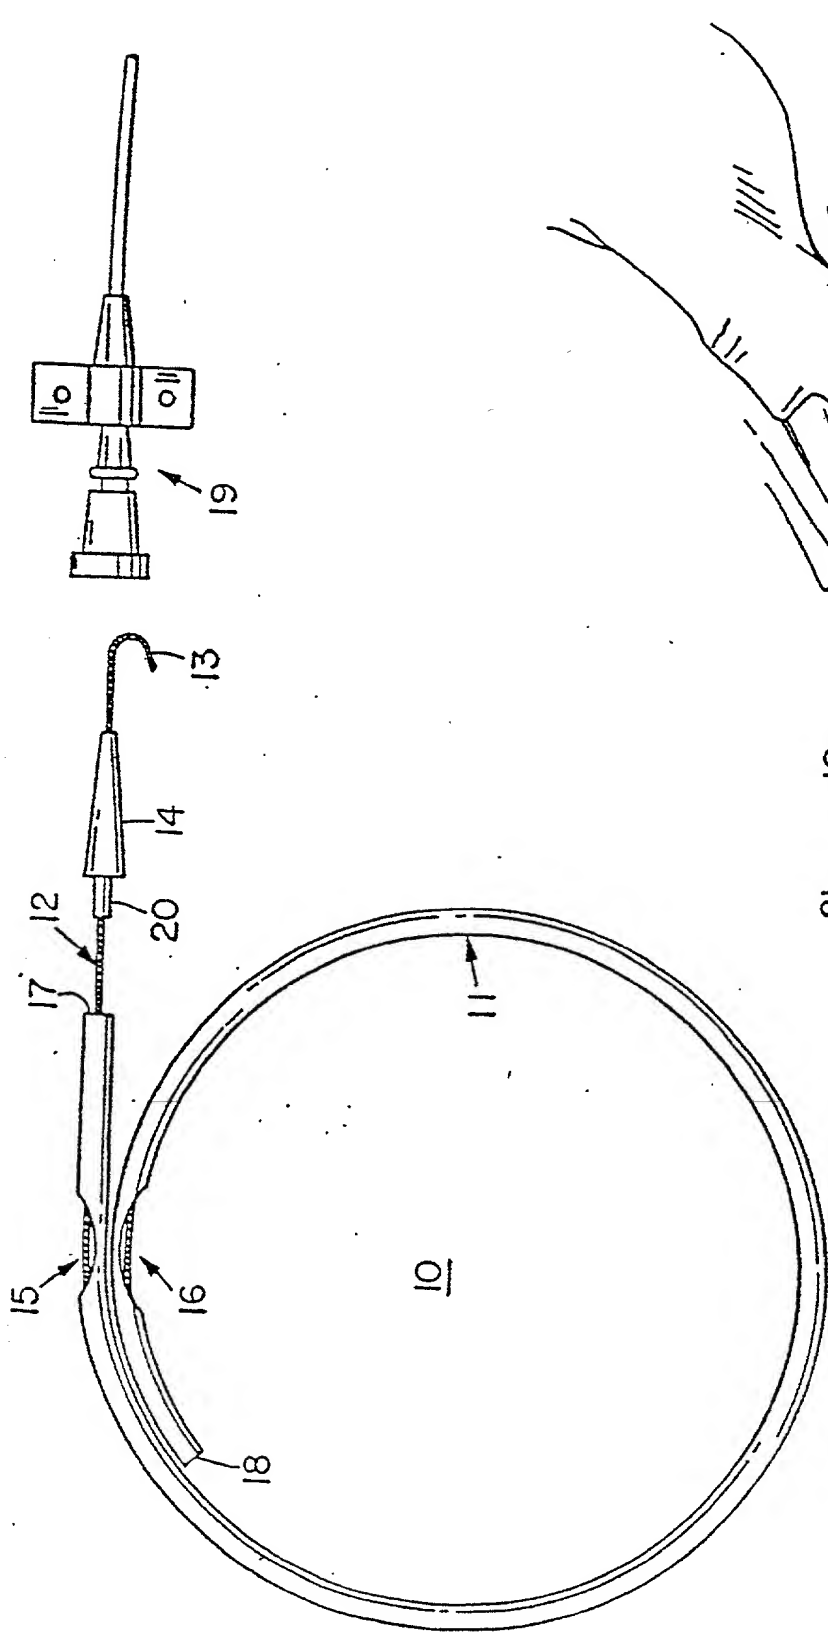


Fig. 1

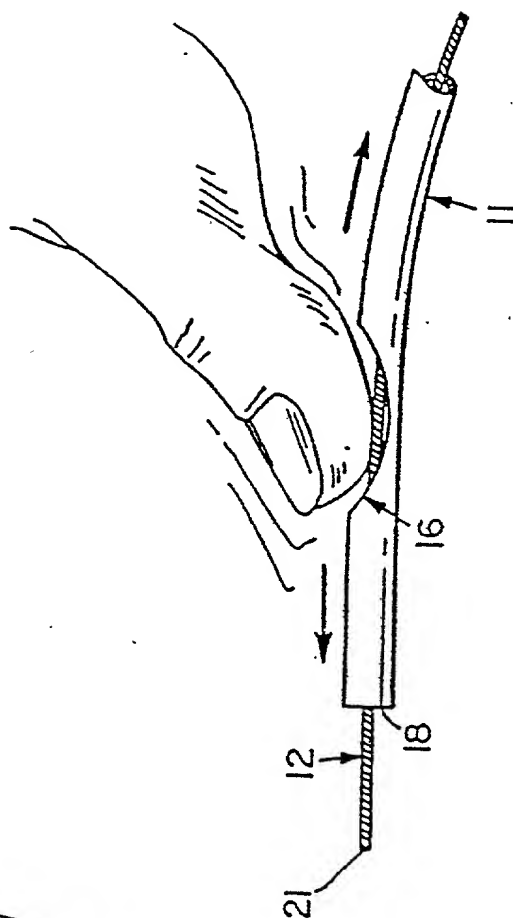


Fig. 2

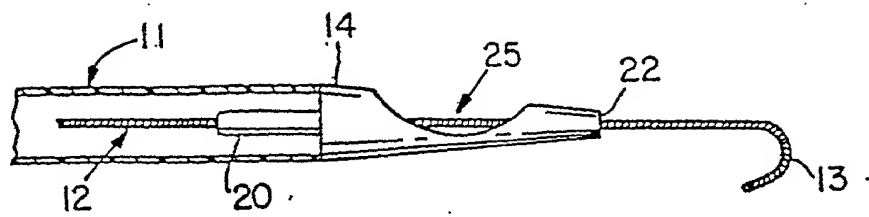


Fig. 3

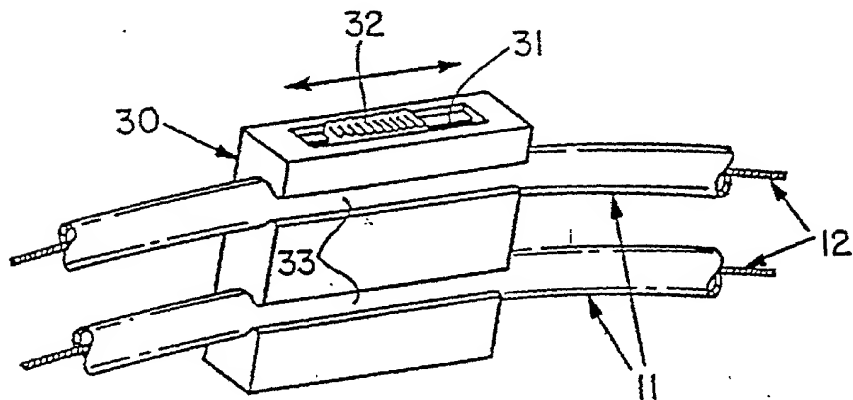


Fig. 4

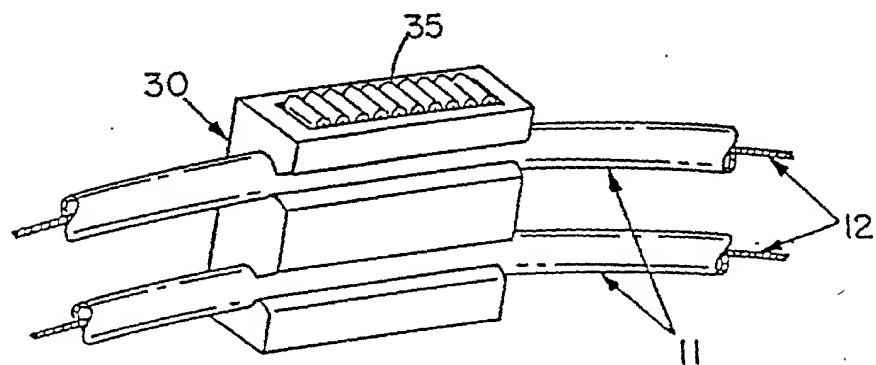


Fig. 5

666260-234460

666250-230450

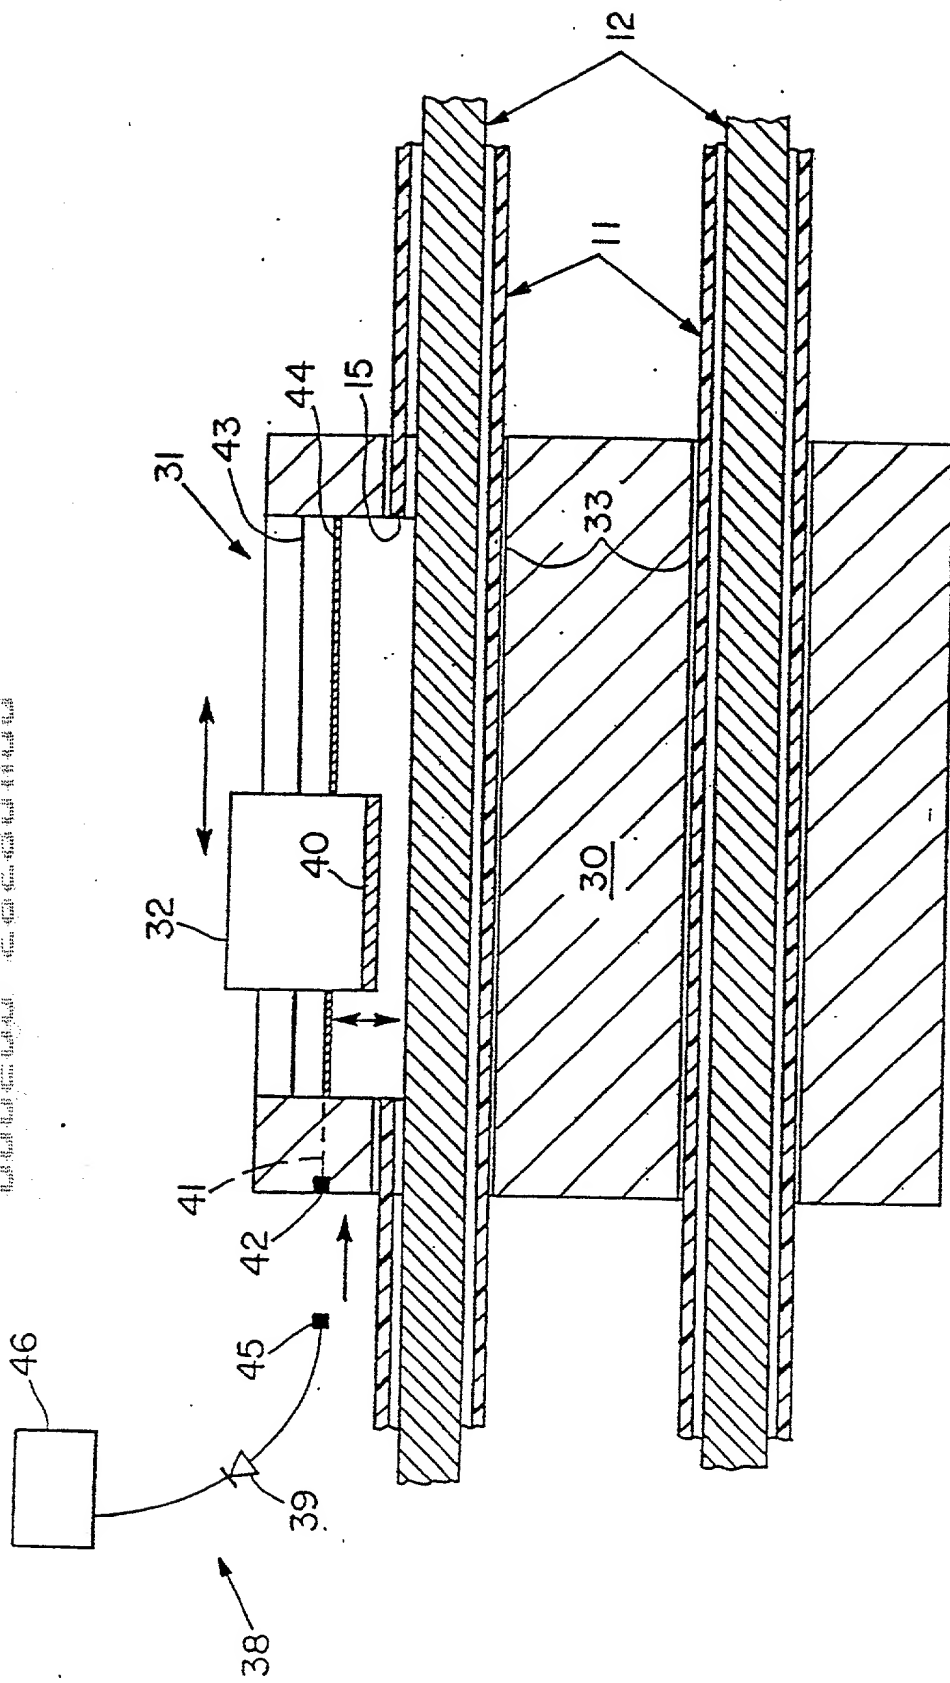


Fig. 6

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Declaration for Patent Application

As a named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated next to my name;

I believe I am the original, first and sole inventor (if only one name is listed) or an original, first and joint inventor (if plural names are listed in the signatory page(s) commencing at page 3 hereof) of the subject matter which is claimed and for which a patent is sought on the invention entitled

GUIDEWIRE ADVANCEMENT SYSTEM

the specification of which (check one)

☒ is attached hereto.

☐ was filed on _____ as
Application Serial No. _____ (if applicable).
and was amended on _____

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

			Priority Claimed	
(Number)	(Country)	(Day/Month/Year filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No
(Number)	(Country)	(Day/Month/Year filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No
(Number)	(Country)	(Day/Month/Year filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No

75

I also hereby grant additional Powers of Attorney to the following attorney(s) and/or agent(s) to file and prosecute an international application under the Patent Cooperation Treaty based upon the above-identified application, including a power to meet all designated office requirements for designated states.

David E. Brook	Registration No. 22,592
James M. Smith	Registration No. 28,043
Leo R. Reynolds	Registration No. 20,884
Richard A. Wise	Registration No. 18,041
Patricia Granahan	Registration No. 32,227
Mary Lou Wakimura	Registration No. 31,804
Thomas O. Hoover	Registration No. 32,470
Alice O. Carroll	Registration No. 33,542
N. Scott Pierce	Registration No. 34,900
Richard W. Wagner	Registration No. 34,480
Alan T. Faber	Registration No. 34,497
Robert T. Conway	Registration No. 33,859
Richard B. Smith	Registration No. 34,020

all of Hamilton, Brook, Smith and Reynolds, P.C., Two Militia Drive, Lexington, Massachusetts 02173;

and

Send correspondence to: Thomas O. Hoover, Esq.
Hamilton, Brook, Smith & Reynolds, P.C.
Two Militia Drive, Lexington, MA 02173

Direct telephone calls to: Thomas O. Hoover, Esq.

(617) 861-6240

✱

Full name of fourth joint
inventor, if any _____
Fourth Inventor's
Signature _____ Date _____
Residence _____

Citizenship _____
Post Office Address _____